

# Q.PLUS-G4.1 270-280

## Q.ANTUM SOLAR MODULE

The new high-performance module Q.PLUS-G4.1 is the ideal solution for all applications thanks to its innovative cell technology Q.ANTUM. The world-record cell design was developed to achieve the best performance under real conditions – even with low radiation intensity and on clear, hot summer days.



### Q.ANTUM TECHNOLOGY: LOW LEVELIZED COST OF ELECTRICITY

Higher yield per surface area and lower BOS costs and higher power classes and an efficiency rate of up to 17.1 %.



### INNOVATIVE ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behaviour.



### ENDURING HIGH PERFORMANCE

Long-term yield security with Anti-PID Technology<sup>1</sup>, Hot-Spot-Protect and Traceable Quality Tra.Q™.



### LIGHT-WEIGHT QUALITY FRAME

High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (4000 Pa).



### MAXIMUM COST REDUCTIONS

Up to 10 % lower logistics costs due to higher module capacity per box.



### SAFE ELECTRONICS

Protection against short circuits and thermally induced power losses due to breathable junction box and welded cables.



### A RELIABLE INVESTMENT

Inclusive 12-year product warranty and 25-year linear performance warranty<sup>2</sup>.

### THE IDEAL SOLUTION FOR:



Rooftop arrays on residential buildings



Rooftop arrays on commercial/industrial buildings



Ground-mounted solar power plants




<sup>1</sup> APT test conditions: Cells at -1000V against grounded, with conductive metal foil covered module surface, 25 °C, 168h

<sup>2</sup> See data sheet on rear for further information.

## MECHANICAL SPECIFICATION

<b>Format</b>	1670 mm × 1000 mm × 32 mm (including frame)
<b>Weight</b>	18.8 kg
<b>Front Cover</b>	3.2 mm thermally pre-stressed glass with anti-reflection technology
<b>Back Cover</b>	Composite film
<b>Frame</b>	Black anodised aluminium
<b>Cell</b>	6 × 10 Q.ANTUM dark solar cells
<b>Junction box</b>	110 mm × 115 mm × 23 mm Protection class IP67, with bypass diodes
<b>Cable</b>	4 mm <sup>2</sup> Solar cable; (+) 1000 mm, (-) 1000 mm
<b>Connector</b>	Tyco, Solarlok PV4, IP68

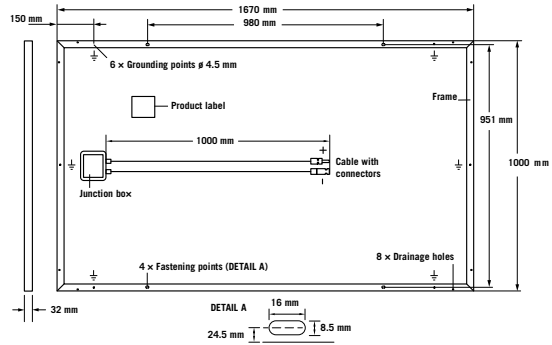


## ELECTRICAL CHARACTERISTICS

POWER CLASS		270	275	280	
MINIMUM PERFORMANCE AT STANDARD TESTING CONDITIONS, STC <sup>1</sup> (POWER TOLERANCE +5W /- 0W)					
Minimum	Power at MPP <sup>2</sup>	$P_{MPP}$	270	275	280
	Short Circuit Current*	$I_{SC}$	9.35	9.41	9.47
	Open Circuit Voltage*	$V_{OC}$	38.56	38.82	39.08
	Current at MPP*	$I_{MPP}$	8.77	8.84	8.91
	Voltage at MPP*	$V_{MPP}$	30.80	31.12	31.43
	Efficiency <sup>2</sup>	$\eta$	≥16.2	≥16.5	≥16.8
MINIMUM PERFORMANCE AT NORMING OPERATING CONDITIONS, NOC <sup>3</sup>					
Minimum	Power at MPP <sup>2</sup>	$P_{MPP}$	200.2	203.9	207.6
	Short Circuit Current*	$I_{SC}$	7.54	7.59	7.64
	Open Circuit Voltage*	$V_{OC}$	35.98	36.22	36.46
	Current at MPP*	$I_{MPP}$	6.87	6.93	6.99
	Voltage at MPP*	$V_{MPP}$	29.15	29.43	29.71

<sup>1</sup>1000 W/m<sup>2</sup>, 25°C, spectrum AM 1.5 G    <sup>2</sup>Measurement tolerances STC ±3%; NOC ±5%    <sup>3</sup>800 W/m<sup>2</sup>, NOCT, spectrum AM 1.5 G    \* typical values, actual values may differ

## Q CELLS PERFORMANCE WARRANTY

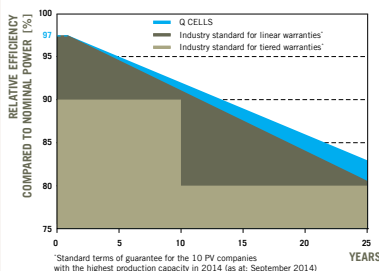


At least 97% of nominal power during first year. Thereafter max. 0.6% degradation per year.  
At least 92% of nominal power after 10 years.  
At least 83% of nominal power after 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

\*Standard terms of guarantee for the 10 PV companies with the highest production capacity in 2014 (as at: September 2014)

## PERFORMANCE AT LOW IRRADIANCE

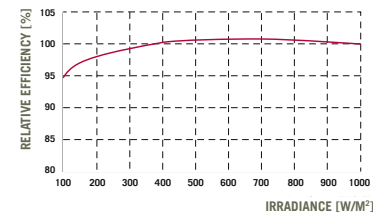

The typical change in module efficiency at an irradiance of 200 W/m<sup>2</sup> in relation to 1000 W/m<sup>2</sup> (both at 25 °C and AM 1.5 G spectrum) is -1.5% (relative).

## TEMPERATURE COEFFICIENTS

<b>Temperature Coefficient of <math>I_{SC}</math></b>	$\alpha$	[%/K]	+0.04	<b>Temperature Coefficient of <math>V_{OC}</math></b>	$\beta$	[%/K]	-0.29
<b>Temperature Coefficient of <math>P_{MPP}</math></b>	$\gamma$	[%/K]	-0.40	<b>Normal Operating Cell Temperature</b>	<b>NOCT</b>	[°C]	45

## PROPERTIES FOR SYSTEM DESIGN

<b>Maximum System Voltage</b>	$V_{SYS}$	[V]	1000	<b>Safety Class</b>	II
<b>Maximum Reverse Current</b>	$I_r$	[A]	20	<b>Fire Rating</b>	C
<b>Wind/Snow Load (in accordance with IEC 61215)</b>		[Pa]	4000/5400	<b>Permitted Module Temperature On Continuous Duty</b>	-40 °C up to +85 °C

## QUALIFICATIONS AND CERTIFICATES

VDE Quality Tested, IEC 61215 (Ed. 2); IEC 61730 (Ed. 1), Application class A  
This data sheet complies with DIN EN 50380.



## PARTNER

**NOTE:** Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Hanwha Q CELLS Australia Pty Ltd  
1402, 20 Berry St., North Sydney NSW 2060, Australia | TEL +61 (2) 9016 3033 | FAX +61 (0)2 9455 0873 | EMAIL q-cells-australia@q-cells.com | WEB www.q-cells.com.au

Engineered in Germany

**Q CELLS**